

MCD4 Programmable Floor Heating Thermostat



Features

- Thin clock thermostat only 20mm, suited for vertical or horizontal mounting
- Easy animated menu navigation and programming
- Set and forget! Adaptive control ensuring comfort temperature at the required time
- Compatible with existing floor sensors, making it the best thermostat for renovation purposes

Control

The MCD4 electronic thermostat offers three control modes:


- Air temperature only via built-in sensor
- Floor temperature only via floor sensor
- Air temperature via built-in sensor whilst limiting floor temperature via floor sensor

Custom Programming Event

- 4 events for 5 days and 2 events for days 6+7
- 4 events for 6 days and 2 events for day 7
- 4 events per day

Technical Data

Supply voltage	230V AC
Output relay	16A resistive load
Temp. range	+5/+40°C
Floor. range	+5/+40°C
Clock function	4-event program
Battery backup	5 years
Ambient temp	0/+40°C
On/Off differential	0.4°C
Protective housing	IP21
External sensor	NTC (12K Ohms)
Size	115mm×84mm×20mm
Approvals	VDE, BEAB, NEMKO, GOST
Warranty	3 Years

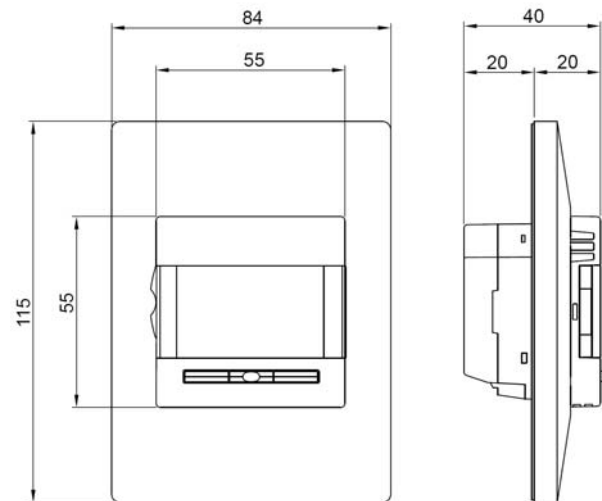

BR-0984-A15a
© 2010 OJ Electronics A/S

Warm Solutions Sydney

PO Box 6238 Silverwater NSW 1811
Tel: (02) 8004 0664 Fax: (02) 8004 8119
Email: info@warmsolutions.com.au
Web: www.warmsolutions.com.au