

MTD2 On/Off Floor Heating Thermostat



Features

- Thin thermostat only 38mm, suited for vertical or horizontal mounting
- With limitation sensor for optimal comfort, avoiding cold tiles during spring and autumn, or as protection against damaging wooden floors
- Built-in interrupter for convenient switching on/off
- Digital display, making it easy to set the required floor or room temperature
- Simple to use, the red button increases the temperature, the blue one lowers it.
- On/off control up to 3,600W, 16A


Control

The MTD2 electronic thermostat offers three on/off control modes:

- Air temperature only via built-in sensor
- Floor temperature only via floor sensor
- Air temperature via built-in sensor whilst limiting floor temperature via floor sensor

Technical Data

Supply voltage	230V AC
Output relay	16A resistive load
Temp. range	+5/+40°C
Floor. range	+5/+55°C
Clock function	4-event program
Ambient temp	0/+50°C
On/Off differential	0.4°C
Protective housing	IP21
External sensor	NTC (12K Ohms), 3m
Size	115mm×84mm×20mm
Warranty	3 Years

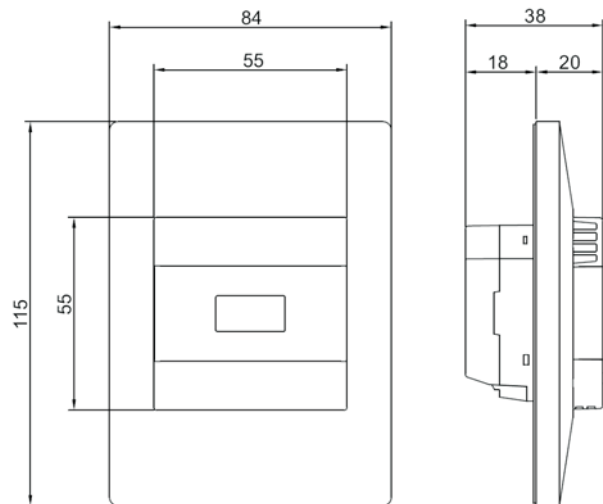

BR-0949-A30a
© 2010 OJ Electronics A/S

Warm Solutions Sydney

PO Box 6238 Silverwater NSW 1811
Tel: (02) 8004 0664 Fax: (02) 8004 8119
Email: info@warmsolutions.com.au
Web: www.warmsolutions.com.au